

Series 2000XL - with continous frame


3-sectioned versatile table with electric motorized height adjustment

… for examination, treatment, therapy …

Model 2650-00XLE und 2651-00XLE white powder coated (RAL 9010)
Model 2650-03XLE und 2651-03XLE white aluminium powder coated (RAL 9006)
Model 2650-04XLE und 2651-04XLE grey aluminium powder coated (RAL 9007)

German manufacture

without picture

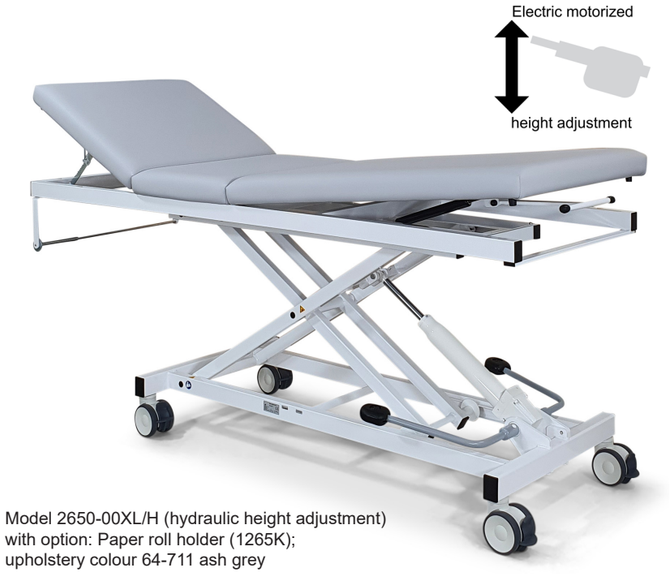

Model 2650-00XL/H (hydraulic height adjustment)
with option: Paper roll holder (1265K);
upholstery colour 64-711 ash grey

Basic equipment:

- Movable on comfort twin castors Ø 100 mm, each with total lock
- Electromotive drive control by foot switch (option: hand switch)
- Integrated safety function for automatic blocking of electromotive drive
- Freewheeling downwards, automatic declutch in case of resistance
- Dewert-hygiene-equipment

Upholstery:

Lying surface 3-sectioned:

- Head part upwards (+30°) adjustable by 2 metal rachets
- Length head part: 550 mm
- Fixed middle part
- Length middle part: 450 mm
- Foot part stepless adjustable to +25° by gas spring
- Length foot part: 950 mm
- Upholstery thickness: 80 mm

Continous frame for mounting of side rail / infusion pole

Technical data:

- Electric motorized height adjustment: 540 mm to 980 mm in 22 sec. by AC-motor with a pressure capacity of 10000 N
- Width of lying surface: Model 2650-..XLE: 700 mm | Model 2651-..XLE: 800 mm
- Length of lying surface: 1950 mm
- Load capacity: 250 kg; according to IEC 60601 tested with fourfold static load

kg

Design:

2 different variants for artificial leather eligible for upholstery covering:

- Skai® Pandoria Plus with velvet-smooth surface
- Skai® Toronto EN with innovative staynu-technology

vertical
adjustment

Updated 06.2022_01
Changes concerning technical data are subject to change

Available as an option (see pricelist for additional options)

Mobility



Art. no. 1182
Without standard mobility



Art. no. 1180N
Movable on twin castors, Ø 100 mm with central lock, basic height +20 mm



Art. no. 1185
Movable on comfort twin castors, Ø 125 mm with central lock, basic height + 50 mm



Art. no. 1045N
Wheel-lifting/fixing mechanism with 4 foot levers for controlled lowering

Additional motor control options



Art. no. 1920E
Hand switch (low voltage), with magnet on the back to fasten



Art. no. 1910E
Foot switch (low voltage)



Art. no. 1940E
1 foot switch fixation mounted at underframe



Art. no. 1950E
Foot switch rail, lateral, on both sides, security adjustment

Additional safety options



Art. no. B1997E
Foot switch cover, made of brushed VA-steel

Wall protection bumpers



Art. no. 1170
1 wall protection bumper Ø 150 mm; in case of side rail 1080: art. no. 1171, Ø 200 mm

Paper roll holder



Art. no. 1265K / 1280K
Paper roll holder, mounted under head part (not protruding), for width 650 mm / 800 mm



Art. no. 1270F / 1280F
Paper roll holder, mounted at foot part (protruding: 70 mm), for width 650 mm / 800 mm

Nose opening



Art. no. 1610
Nose opening, in head part
Art. no. 1620
Upholstery part to close

Side guards



Art. no. 1080
1 side guard lateral lowerable, chromium-plated, completely made of steel tube, length: 1060 mm



Art. no. 1040
1 side guard tiltable, chromium-plated, completely made of steel tube, length: 700 mm

Head part options



Art. no. 1655
Head part stepless adjustable by gas spring (0° to +55°)

Upholstery options

Art. no. 1765 / 1780
Soft covering for pleasant resting comfort, for width 650 mm / 800 mm, thickness 100 mm

Art. no. 1762 / 1782
Upholstery medium-soft (cold foam cover), for width 650 mm / 800 mm, thickness 90 mm

Add-on elements



Art. no. 1410
1 piece of side rail, length: 350 mm



Art. no. 1430
1 attachment clamp for side rail, suitable for pipe: Ø 18 mm



Art. no. 1440
1 arm rest for side rail, without attachment clamp



Art. no. 1450
Infusion pole, without attachment clamp